

# MHAC(V)-CRX SERIES

## HVAC SYSTEMS




### FEATURES AND BENEFITS:

- HAZARDOUS AREA COMPLIANCE ATEX – IECEx – EAC EX
- WIDE OPERATING/STORAGE TEMPERATURE LIMITS (-55°C ÷ 60°C ATEX/IECEx / -52°C ÷ 55°C EAC EX)
- SUITABLE FOR GAS (IIA/IIIB/IIIB+H2/IIIC) AND DUST APPLICATIONS (IIIC)
- FULL COMPLIANCE APPROACH TO CUSTOMER SPECIFICATIONS
- STAINLESS STEEL 304 / 316 CASING
- COATING AND TREATMENT OF MAIN EQUIPMENT AGAINST OFFSHORE/MARINE OR CORROSIVE ENVIRONMENTS
- HIGH EFFICIENCY CLASS FILTER AND CAN BE EQUIPPED WITH CHEMICAL FILTERS
- PRE-WIRED COMMAND CONSOLE
- INTERNAL ELECTRICAL HEATING SYSTEM



### MHAC(V)-CRX series - AERAULIC SCHEME

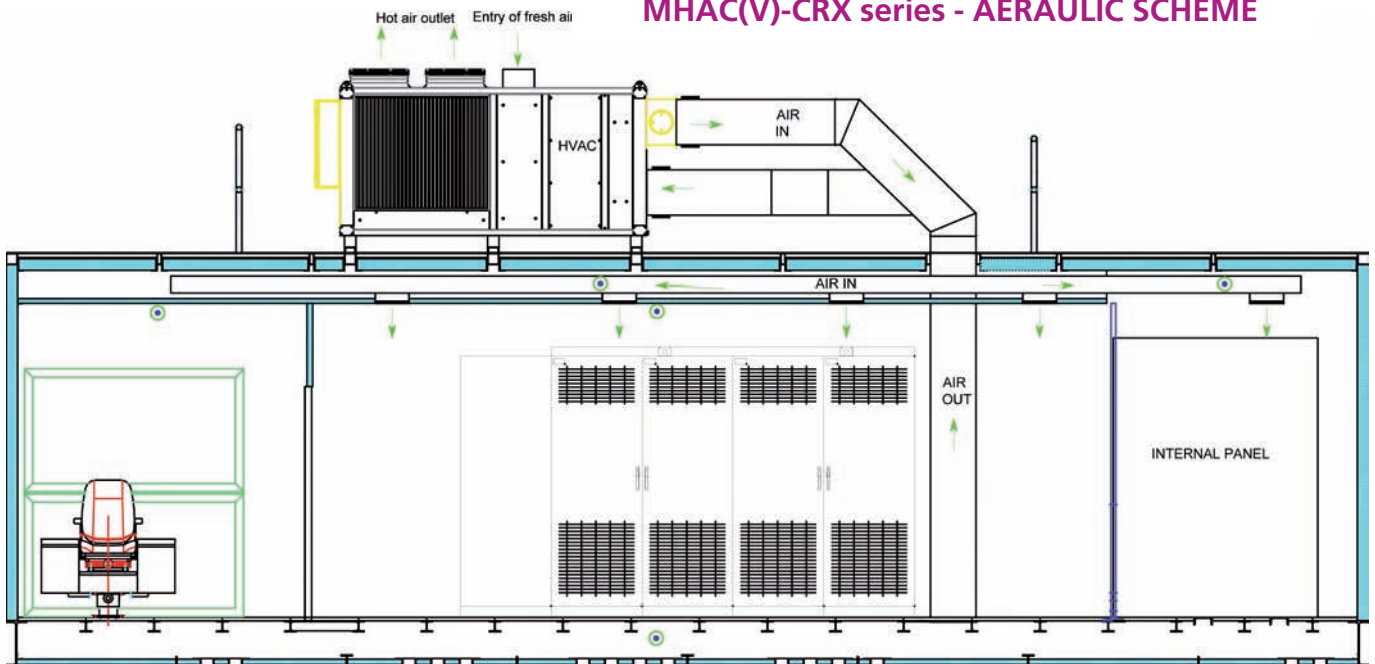

COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV GL  
= ISO 9001 =